
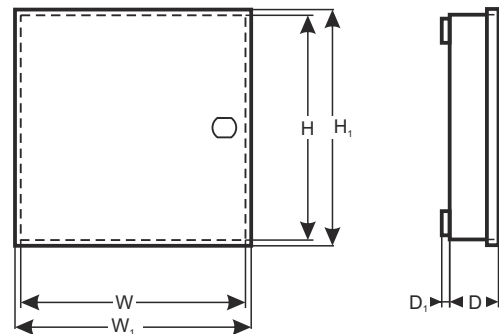


CODE: **AWO602** v.1.0/I
 NAME: **Nedap Power 4M**

EN

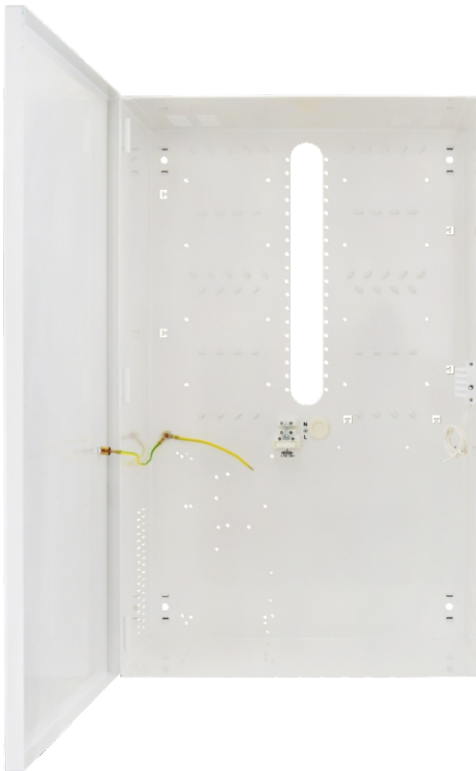

DESTINATION

Nedap modules:

9981624 AP7803m – Access Control Controller (AEpu)
 9981632 AP7003m – Access control expansion module (AEpack)
 9984135 AP7031m – I/O module (AEpack)

Power supply units:

PSC-60A-C*, PSC-100A-C*, PSC-60B-C*, PSC-100B-C*
 SCP-35-12, SCP-50-12, SCP-75-12, SCP-35-24, SCP-50-24, SCP-75-24
 AD-55A, AD-155A, AD-55B, AD-155B
 RS-75-12 (LRS-75-12)
 PSB-12V2A, PSB-12V3A, PSB-12V5A, PSB-12V7A, PSB-12V10A, PSB-24V2A, PSB-24V3A, PSB-24V5A
 PSG2-12V2A, PSG2-12V3A, PSG2-12V5A, PSG2-12V7A, PSG2-24V2A, PSG2-24V3A

*PKAZ041 – required to connect power supply.

TECHNICAL DATA

External dimensions of the enclosure:	W=340, H=550, D+D ₁ =170+14 [+/-2 mm]
External dimensions of the front panel:	W ₁ =345, H ₁ =555 [+/-2 mm]
Battery space:	2x17/18Ah / 12 V Sealed Lead Acid (SLA)
Weight net/gross:	7,0 / 7,582 [kg]
Operating environment:	class II, -10°C+ 40°C
Material description:	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	1 x microswitch: opening, 0,5 A@50 V DC max. NC - normally closed contacts
Closing:	screwed: screw x 1, at the front
Notes:	optional: lockable, distance from wall (mounting surface) - 14mm
Declaration, warranty:	CE, 2 year from the production date