



LIMIT 600

NEW

COMUNELLO
AUTOMATION

Electromechanical 24V barrier raising systems with encoder for residential, public or industrial use
For entrances up to 6 m in width



24 VDC **E** ENCODER **DUAL KIT**

LIMIT 600

For entrances up to 6 m

SUITABLE FOR
INTENSIVE USE

AVAILABLE MODELS:
HP **ONE** TECHNOLOGY


AVAILABLE FINISHES:
Red Black Inox

ARTICLE	LIMIT 600 24V
Power supply	230 VAC
Operator power supply	24 VDC
Power consumption	150 W
Current input	6,2 A
Torque	300 Nm
Operating time	4 - 6 sec
Duty cycle	intensive use
Protection rating (IP)	IP44
Insulation class	2
Working temperature	-20°C / +50°C
Integrated control unit	CU 24V LT
Limit switch	Electromechanical
Encoder	Yes
Weight	65 kg


LIMIT 600 SPRING STRETCHER TOOL	ARM LENGTH (M)				
	2 m	3 m	4 m	5 m	6 m
ARM	1-2	1-2-3	3	3	3
ARM WITH IMPACT PROTECTION STRIPS AND LEDS	1-2	3	3	3	3
ARM WITH IMPACT PROTECTION STRIPS AND LEDS AND POGO END REST	1-2	3	3	3	3
ARM WITH SINGLE IMPACT PROTECTION STRIP, LEDS AND SKIRT	-	3	3	3	-
ARM WITH SINGLE IMPACT PROTECTION STRIP, LEDS, SKIRT AND POGO END REST	-	3	3	3	-



LIMIT 600



DIMENSIONS

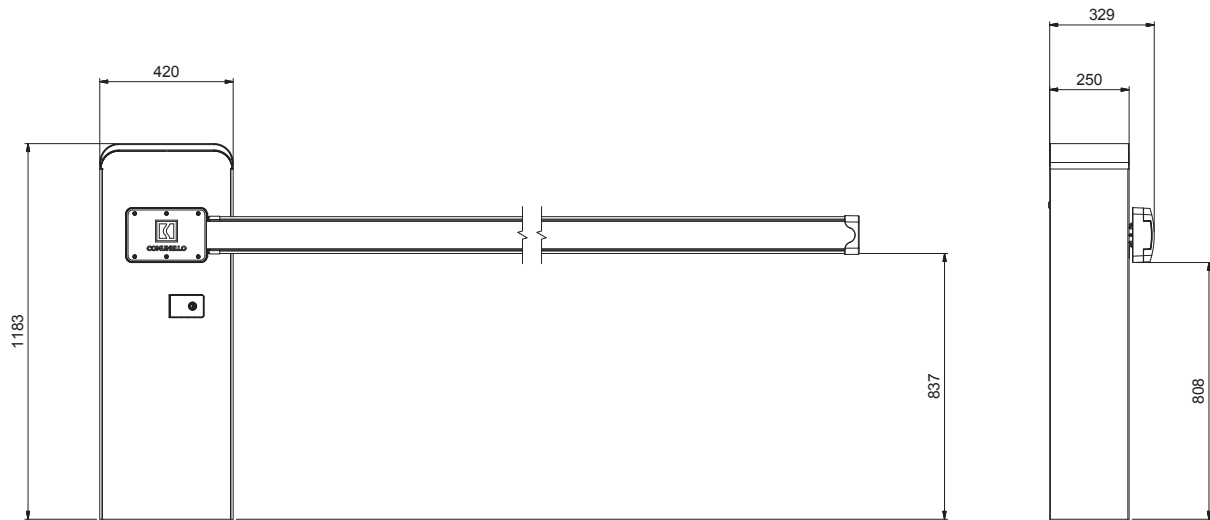

MAIN FITTINGS



AC 40
SIGNAGE TABLE



AC 510
FOUNDATION ANCHORING KIT



AC 541
ONE BAR SPRING



AC 560
BAR SUPPORT



AC 570
MOBILE BAR SUPPORT



AC 580
90° JOINTED ROD



AC 655
ALUMINIUM RECTANGULAR BAR, RAL 9010, 6 M



AC 695
RED BAR COVER, 6 M.



AC 700
BARRIER COVER PLUG



AC 710
BARRIER COVER PLUG



AC 715
BARRIER COVER PLUG



AC 590
2 M CURTAIN



AC 660
REFLECTIVE ADHESIVE STRIPS



AC 770
INTERNAL LED LIGHTS



AC 800
5 M LED STRIP



AC 30
OUTDOOR ANTENNA



AC 240
INDUCTIVE SENSOR



DART
PHOTOCELLS



SWIFT LED
BLINKING WARNING LIGHTS



VICTOR 2 RC
2 CHANNEL, ROLLING CODE
REMOTE CONTROL



INDEX
KEY SELECTOR SWITCH



TACT RADIO
DIGITAL SWITCH WITH
RADIO CONTROLLED KEYPAD



MAST 50
EXTRUDED ALUMINIUM COLUMN
H 50 CM