DS-KIS101-P/Flush Video Intercom Two-Wire Analog Bundle





Key Feature

- 2-Wire plug & play, easy, cost-efficient
- Receive video call and Unlock via indoor station
- 7-inch TFT screen with 1024*600 resolution
- 2MP HD colorful camera
- View in color, even in darkness
- One-touch calling with nametag
- IP65 water resistant, preventing from water ingress
- IK7 vandal resistant
- 2 lock relays, power supply for one electric lock (Up to 12V 1A)


Specification

Door station				
Supplement light	IR supplement			
Lens	Low Illumination 2 MP HD IR Camera			
FOV	Horizontal: 100 $^\circ$, Vertical: 69 $^\circ$			
WDR	Support			
Resolution	2MP			
Door station				
Audio input	Built-in omnidirectional microphone			
Audio output	Built-in loudspeaker (More than 80 dB within 20 cm)			
Volume adjustment	Adjustment with screwdriver			
Door station				
Alarm input	4			
Two-Wire	1			

TAMPER	1			
Exit button	2			
Lock control	2, locking time can be adjusted via DIP switch (Max. 7 s)			
Door contact input	2			
Power supply for lock	1, Max. 12 V 1 A			
Debugging port	1			
Door station				
Button	1			
Installation	Flush mounting			
Protective level	IP65, IK7			
Working temperature	-30 $^\circ$ C to +60 $^\circ$ C (-22 $^\circ$ F to 140 $^\circ$ F)			
Working humidity	10% to 90%			
Dimensions	150 mm \times 82 mm \times 23.5 mm (5.91" \times 3.23" \times 0.93")			
Power supply	48 VDC, 0.5 A			
Application environment	Outdoor			
Power consumption	≤ 12 W			
Door station				
Operation system	Embedded analog operation system			
Indoor station				
Size	7-inch TFT non-touch screen			
Operation method	6 touch buttons			

HIKVISION°

Туре	Colorful TFT screen			
Resolution	1024 × 600			
Indoor station				
Audio input	Built-in omnidirectional microphone			
Audio output	Built-in loudspeaker (More than 80 dB within 20 cm)			
Audio quality	/			
Volume	Adjustable with touch-button			
Audio				
compression	1			
Rate				
Indoor station				
Two-wire	3			
Indoor station				
Power supply	48 VDC			
Power consumption	≤ 5 W			
Working temperature	-10 $^\circ$ C to 50 $^\circ$ C (14 $^\circ$ F to 122 $^\circ$ F)			
Working humidity	10% to 90%			
Dimensions (W	187 mm $ imes$ 137 mm $ imes$ 25.4 mm (7.36"			
imes H $ imes$ D)	imes 5.39" $ imes$ 1.00")			
Installation	Surface mounting			
Button	6			
Indoor station				
Operation system	Embedded analog operation system			

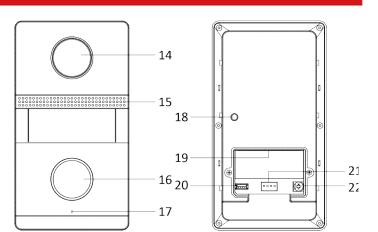



No.	Description	No.	Description
1	Screen	12	DIP Switch
2	Microphone	13	Debugging
			Port
3	Volume +	14	Camera
4	Volume -	15	Loudspeaker
5	Receive	16	Call Button
	/Decline		
6	Unlock Door	17	Microphone
	2		
7	Unlock Door	18	TAMPER
	1		
8	Monitor	19	Terminals
	/Switch		
9	Terminals	20	Debugging
			Port
10	Loudspeaker	21	DIP Switch
11	Power	22	Volume
	Terminal		Adjust

Available Model


DS-KIS101-P/Flush(海外标配)(样机),

Physical Interface






Dimension



HIKVISION°



Unit:mm

HIKVISION°

Distributed by

Γ

HIKVISION°

Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 overseasbusiness@hikvision.com

Hikvision USA T +1-909-895-0400 sales.usa@hikvision.com

Hikvision Australia T +61-2-8599-4233 salesau@hikvision.com

Hikvision India T +91-22-28469900 sales@pramahikvision.com

Hikvision Canada T +1-866-200-6690 sales.canada@hikvision.com

Hikvision Thailand T +662-275-9949 sales.thailand@hikvision.com Hikvision Europe T +31-23-5542770 sales.eu@hikvision.com

Hikvision Italy T +39-0438-6902 info.it@hikvision.com

Hikvision Brazil T +55 11 3318-0050 Latam.support@hikvision.com

Hikvision Turkey T +90 (216)521 7070- 7074 sales.tr@hikvision.com

Hikvision Malaysia T +601-7652-2413 sales.my@hikvision.com Hikvision UK & Ireland T +01628-902140 sales.uk@hikvision.com

Hikvision South Africa Tel: +27 (10) 0351172 sale.africa@hikvision.com

Hikvision France T +33(0)1-85-330-450 info.fr@hikvision.com

Hikvision Kazakhstan T +7-727-9730667 nikia.panfilov@hikvision.ru

Hikvision Vietnam T +84-974270888 sales.vt@hikvision.com Hikvision UAE T +971-4-4432090 salesme@hikvision.com

Hikvision Singapore T +65-6684-4718 sg@hikvision.com

Hikvision Spain T +34-91-737-16-55 info.es@hikvision.com

Hikvision Tashkent T +99-87-1238-9438 uzb@hikvision.ru

Hikvision Hong Kong T +852-2151-1761 info.hk@hikvision.com Hikvision Russia T +7-495-669-67-99 saleru@hikvision.com

Hikvision Korea T +82-(0)31-731-8817 sales.korea@hikvision.com

Hikvision Poland T +48-22-460-01-50 info.pl@hikvision.com

Hikvision Indonesia T +62-21-2933759 Sales.Indonesia@hikvision.com

Hikvision Colombia sales.colombia@hikvision.com

© Hikvision Digital Technology Co., Ltd. 2020 | Data subject to change without notice |